


特性 Characteristic

- 小型, 大负载, 可达16A
Small size with 16A switching capability.
- 低功耗, 可供200mW线圈功耗
Low coil power consumption: 200mW available.

安规认证 Safety Approval: UL,C-UL,CQC,TUV
订货标记 Ordering Information

型号命名规则 Model Naming Rules						
DE76	-DC	12V	D	F	-A	S X
特殊参数: 无: 标准型 Special parameters: Blank: Standard type						
封装方式: S: 塑封型 SH: 防水型 Enclosure Type: S: Plastic sealed type. SH: Sealed type washable						
触点形式: A: 常开型 Contact Form: A: Form A						
绝缘等级: 无: 普通型, B: 等级 B, F: 等级 F Insulation System: Blank: Standard type, B: Class B, F: Class F						
线圈功耗: D: 0.20W / 0.34W(48V) Coil Power: D: 0.20W / 0.34W(48V)						
线圈电压: 3V, 5V, 6V, 9V, 12V, 18V, 24V, 48V Coil Voltage: 3V, 5V, 6V, 9V, 12V, 18V, 24V, 48V						
线圈性质: DC: 直流 Coil Type: DC: Direct current						
产品型号: DE76 Model: DE76						

线圈参数 Coil Data (at 20°C)

额定电压 Rated Voltage (VDC)	额定电流 Rated Current ±10% (mA)	线圈电阻 Coil Resistance ±10% (Ω)	最大连续外加电压 Max. Continuous Voltage Applied	吸合电压 Pick Up Voltage (Max.)	释放电压 Drop Out Voltage (Min.)	额定功率 Power Consumption At Rated Voltage
3	66.67	45	额定电压的150% 150% of rated voltage	额定电压的75% 75% of rated voltage	额定电压的5% 5% of rated voltage	约 Approximately 0.20W
5	40.00	125				
6	33.33	180				
9	22.22	405				
12	16.67	720				
18	11.11	1,620				
24	8.33	2,800				
48	7.08	6,777				约 Approx. 0.34W

触点负载 Contact Rating


型号 Model	DE76
阻性负载 Resistive Load	16A 250VAC
最大切换电流 Max. Switching Current	16A
最大切换电压 Max. Switching Voltage	250VAC
最大切换功率 Max. Switching Power	4,000VA

规格说明 Specification

触点材料 Contact Material	银合金 Ag Alloy	
接触电阻 Contact Resistance	50mΩ Max.	
吸合时间 Operate Time	15ms. Max.	
释放时间 Release Time	8ms. Max.	
绝缘电阻 Insulation Resistance	1,000MΩ Min.(DC500V)	
介电耐压 Dielectric Strength	触点与触点间 Between open contact: AC1,000V, 50/60Hz 1min.	
	线圈与触点间 Between coil and contact: AC2,500V, 50/60Hz 1min.	
抗振动 Vibration Resistance	耐久 Endurance	10~55Hz, 双振幅 1.5 mm 10~55Hz, 1.5 mm double amplitude
	误动作 Misoperation	10~55Hz, 双振幅 1.5 mm 10~55Hz, 1.5 mm double amplitude
抗冲击 Shock Resistance	耐久 Endurance	10g Min.
	误动作 Misoperation	100g Min.
寿命 Life	机械寿命 Mechanical Life	10,000,000 operations
	电气寿命 Electrical Life	100,000 operations
环境温度 Ambient Temperature	-40°C~+85°C	
重量 Weight	约 Approx. 8.6g	

外形尺寸、接线、安装孔位图(mm)

Outline Dimensions, Wiring Diagram, Mounting Hole Layout (mm)

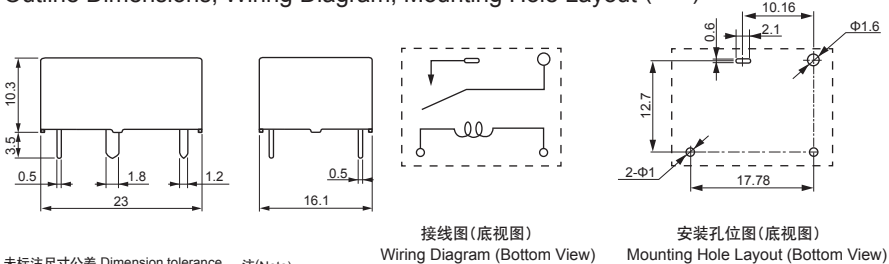

未标注尺寸公差 Dimension tolerance
 <1mm: ± 0.2 mm
 1~5mm: ± 0.3 mm
 >5mm: ± 0.4 mm

(Note):
 安装孔尺寸公差 ± 0.1 mm
 Dimension tolerance of the mounting hole ± 0.1 mm

典型用途 Typical Applications

- 家用电器、办公自动设备、仪器仪表等 Household appliances, office equipment, instrument and apparatus, etc.

性能曲线图 Performance Curves

